

Mini Digital MultiMeter + IR Thermometer

8 Function, rugged designed multimeter with built-in IR Thermometer

Quickly identify overheating motors or locate hot spots on electrical panels and HVAC vents without contact


Features:

- Built-in IR Thermometer with laser pointer for locating hot spots
- 4:1 Distance to Target Ratio
- 2000 count large backlit dual LCD with easy-to-read digits
- Low current capability measure down to 0.1µA
- Max Hold
- Input fuse protection
- Auto power off and Data Hold
- Complete with test leads and 9V battery

BUILT IN IR
Thermometer 
Patented



Built-in non-contact IR Thermometer quickly identifies hot spots on electrical panels

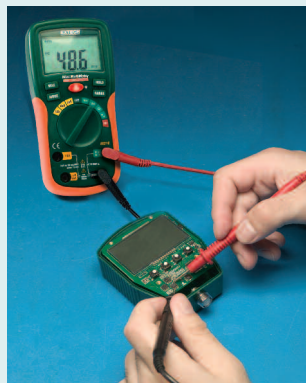

AC/DC Voltage measurements

Specifications

AC Voltage	0.1mV to 600V
DC Voltage	0.1mV to 600V
Basic Accuracy (VDC)	±0.5%
AC Current	0.1µA to 10A
DC Current	0.1µA to 10A
Resistance	0.1Ω to 20MΩ
Temperature (IR)	-5 to 446°F (-20 to 230°C)
Continuity / Diode	Yes
Dimensions	5.8x2.9x1.6" (147x76x42mm)
Weight	9.17oz (260g)

Ordering Information

EX210Autoranging MultiMeter + IR Thermometer

EX210-NISTEX210 with Calibration Traceable to NIST.



สนใจติดต่อ บริษัท เอเมท จำกัด 31 ซอย โกสุมรวมใจ 37 แยก 2 แขวงดอนเมือง เขต ดอนเมือง กรุงเทพฯ. 10210

โทร.02-503-8900, แฟกซ์ : 02-981-0181, 02-981-0182 email : sales@amet.net , Web: www.amet.net

