



## Dual Input Differential Manometer

PM-730 Features:

Most Robust Differential Pressure Meter.

4 switchable units:


inWC, mmWC, mbar, PSI

Rubber-boot protection for tough applications.

Dual Display and Dual Input.

Main display: P1, P2

Second Display P1 -P2

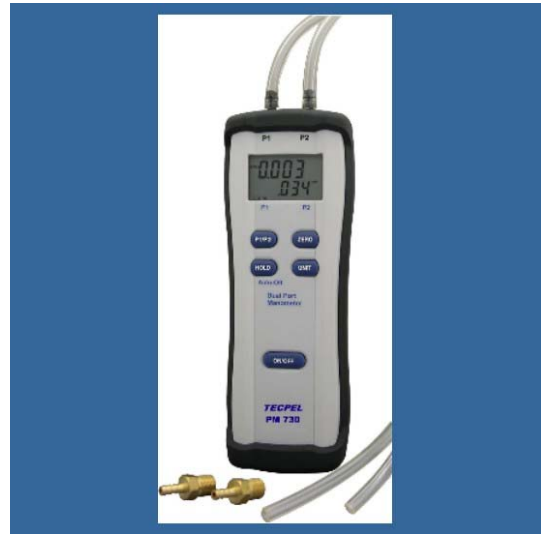

### Specifications:

- PM-730
  - Accuracy 0 to 50°C (32 °C ~ 122 °C)  $\pm 1.5\%$ FS
  - Operating Environment 0 to 50°C(32 °C ~ 122 °C) ambient
  - Compatible Media Dry, non-corrosive gases
  - Battery Power 9V
  - Battery Life 200 hours with low battery indication on display
  - Units of Measurements inWC, mmWC, mbar, PSI
  - Pressure ports tube connectors for 8mm, I.D. flexible tubing
  - Dimensions 180 mm(H) x 60 mm(W) x 30mm(D)
  - Weight approx. 195 g including battery.
  - Measurement range in WC: 0.00 to  $\pm 60.0$
  - mmWC: 0.0 to  $\pm 1500$
  - mBar: 0.00 to  $\pm 150.0$
  - PSI: 0.000  $\pm 2.000$
  - Accuracy  $\pm 1.5\%$  FS