


## True RMS AC Voltage/Current Datalogger

**Datalog up to 100,000 readings**  
With user programmable sample rate from 1 second to 24 hours

### Features:

- Measure True RMS AC Voltage (600V) or Current (200A)
- Readings can be downloaded to your PC via the USB interface and analyzed using the included software or exported to a spreadsheet
- LCD indicates time/date, current readings, and Min/Max
- Normal, Peak and Capture (userspecified trigger level) recording modes
- Auto Power off and battery check
- Complete with current clamp, test leads, USB cable, Windows<sup>®</sup> compatible software, universal AC Adaptor, and four AAA batteries

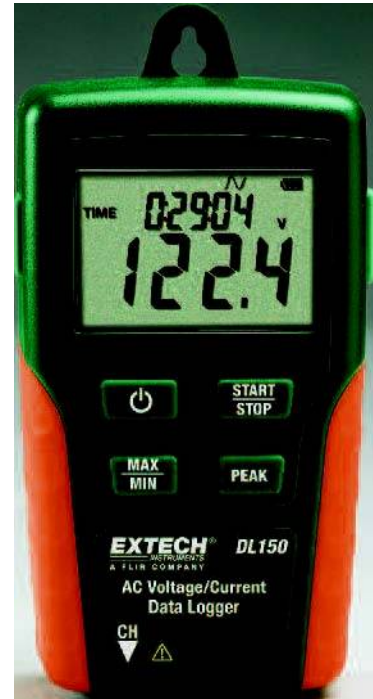

Function	Range	Resolution	Basic Accuracy
AC Current	10 to 200A	0.1A	±(2% rdg ± 1A)
AC Voltage	10 to 600V	0.1V	±(1.5% rdg ± 1V)
Memory	100,000 points		
Sampling Rate	1 second to 24 hours		
PC Interface	USB includes software		
Power	4 x AAA batteries		
Dimensions	4.5 x 2.5 x 1.3" (114 x 63 x 34mm)		
Weight	8.7oz (248g)		

### Ordering Information:

DL150 .....True RMS AC Voltage/Current Datalogger

สนใจติดต่อ บริษัท เอเมท จำกัด 31 ซอย โกสุมรวมใจ 37 แยก 2 แขวงดอนเมือง เขต ดอนเมือง กรุงเทพฯ. 10210

โทร.02-503-8900, แฟกซ์ : 02-981-0181, 02-981-0182 email : [sales@amet.net](mailto:sales@amet.net) , Web: [www.amet.net](http://www.amet.net)